


0.6/1 (1.2) KV

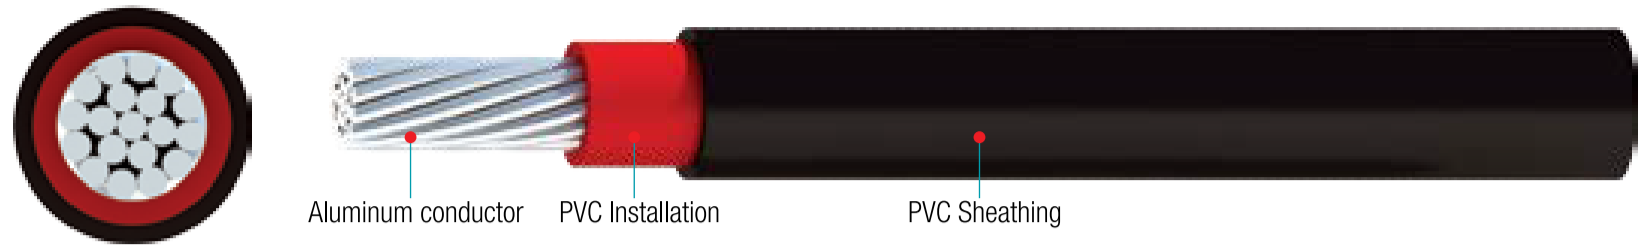

Single Core Cables with stranded circular Aluminum Conductors, PVC insulated and PVC Sheathed

Product-Code	Nominal Cross Sectional Area	Max. Conductor Resistance		Current Rating in Air						Approx. Overall Diameter	Approx Weight
		DC at 20 °C	AC at 70 °C	Laid in Ground			Laid in free Air				
	mm ²	Ω/km	Ω/km	⊙⊙⊙	⊙⊙	⊙	⊙	⊙⊙	⊙⊙⊙	mm	kg / km
A15P201UP	16	1.9100	2.2900	65	63	50	65	60	45	9.9	132
A16P201UP	25	1.2000	1.4400	85	83	65	85	80	65	11.6	185
A17P201UP	35	0.8680	1.0400	105	102	80	105	100	85	12.7	250
A18P201UP	50	0.6410	0.7700	125	120	95	125	120	105	14.6	295
A19P201UP	70	0.4430	0.5330	155	145	120	165	155	125	16.3	375
A20P201UP	95	0.3200	0.3850	185	175	135	205	195	160	18.7	500
A21P201UP	120	0.2530	0.3050	210	200	165	235	225	185	20.4	605
A22P201UP	150	0.2060	0.2480	235	225	180	265	255	210	22.6	725
A23P201UP	185	0.1640	0.1980	265	255	205	310	300	245	24.8	900
A24P201UP	240	0.1250	0.1510	310	295	240	365	355	290	28.3	1150
A25P201UP	300	0.1000	0.1220	355	335	270	420	405	335	31.1	1420
A26P201UP	400	0.0778	0.0954	410	380	310	500	480	390	35.3	1750
A27P201UP	500	0.0605	0.0751	465	430	355	580	560	460	38.8	2220
A28P201UP	630	0.0469	0.0595	535	490	405	680	660	535	42.7	2750
A29P201UP	800	0.0367	0.0470	600	530	450	765	745	620	47.2	3450

The above data is approximate and subjected to manufacturing tolerance.

